


Livewell V2 Manual




2 | Parts List

1. Livewell Tank Assembly
2. Intake Tube
3. Intake Ziptie
4. Drain Tube Level Clip
5. Charger
6. Battery
7. Pump Cap

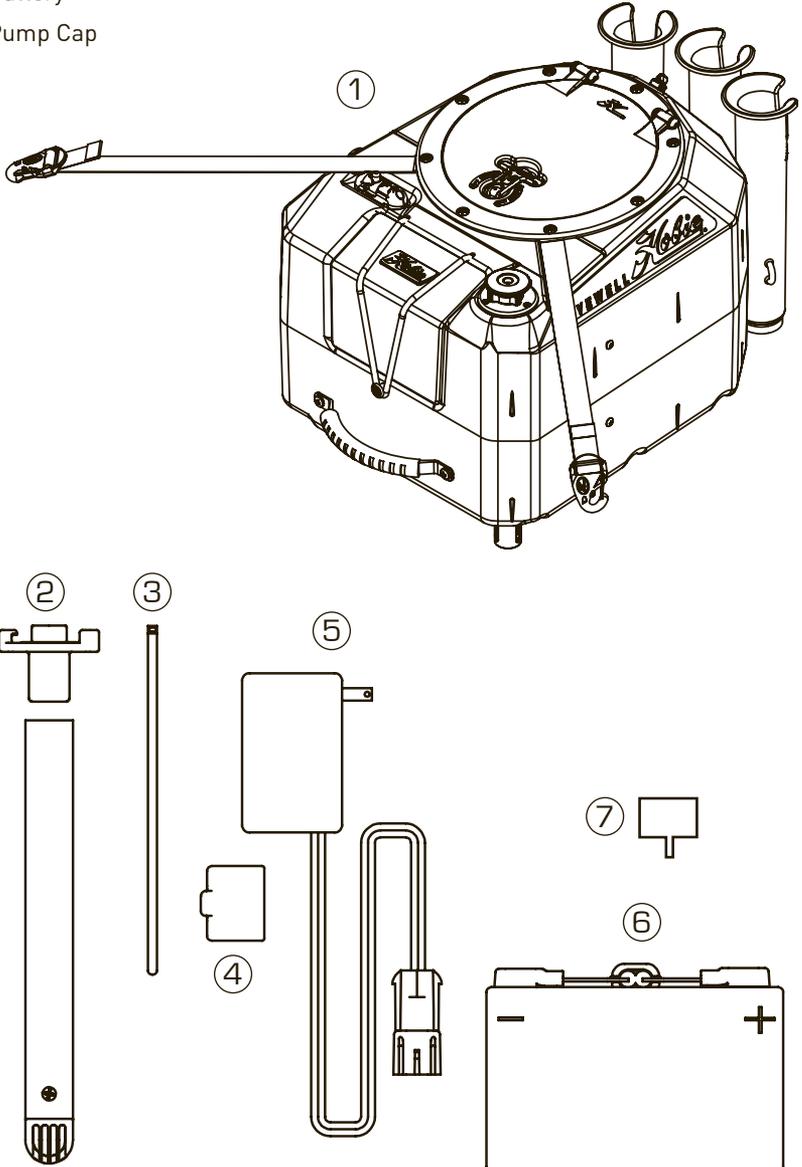


①

Plug in your charger and connect the charger cable to the battery. The battery will take about 8-10 hours to fully charge. A green light indicates a full charge has been reached.

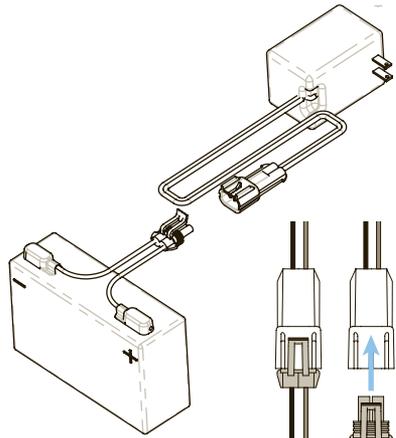

②

Remove the battery cover on the Livewell and plug the battery into the tank connector as shown.


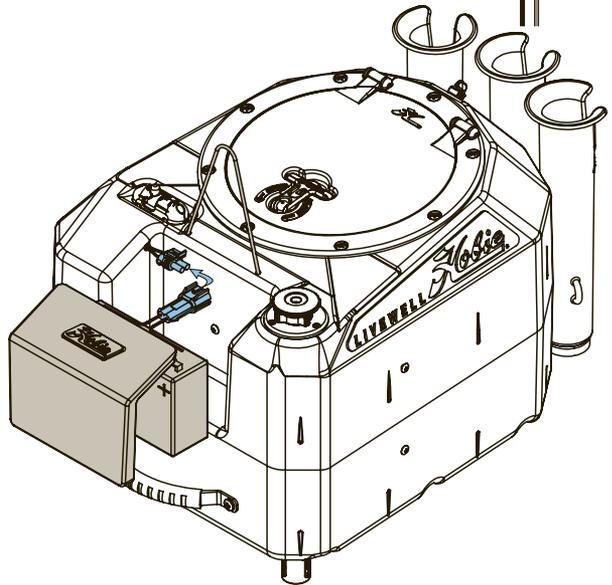


③

Replace the battery cover and stretch the Bungee ® over, securing it to the eyelet post below.


④

Turn the switch ON momentarily to test that the pump is working. Do not leave the pump running without circulating water, as this could damage the pump.

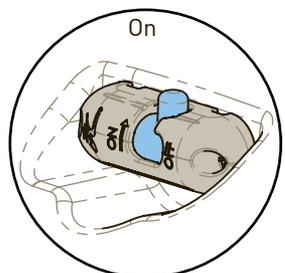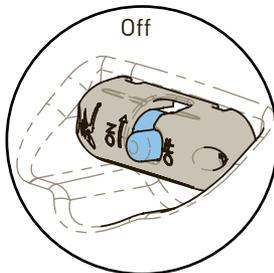


4 | Intake Installation

Note: Small adjustment to the tube length and orientation may need to be made before use. Follow instructions on page 6 for adjusting the intake tube.

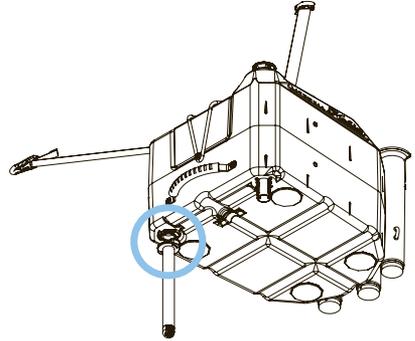



①

Align the tabs on intake connector with the tank connector on the bottom of the tank.

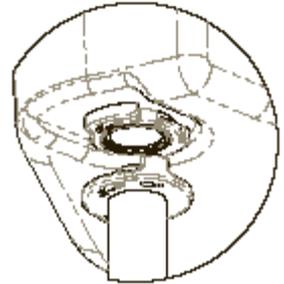


②

Interlock the two tabs by turning the intake connector clockwise.

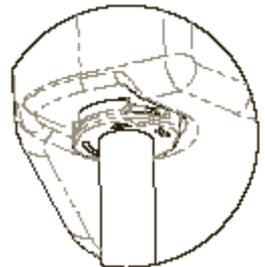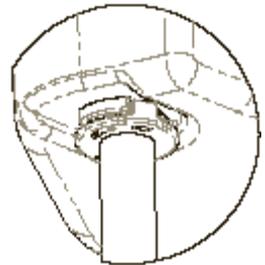


①

Plug the Livewell intake and drain tube into the cargo scuppers, making sure the opening on the intake is facing the bow.

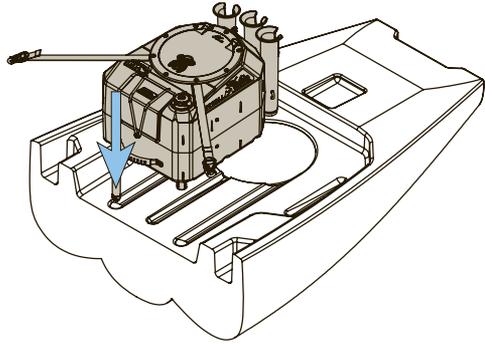


Note that the ProAngler 17T has two different plug-in locations for Livewells and may be arranged as shown below. The direction of the pickup tube will need to be set to face the bow.

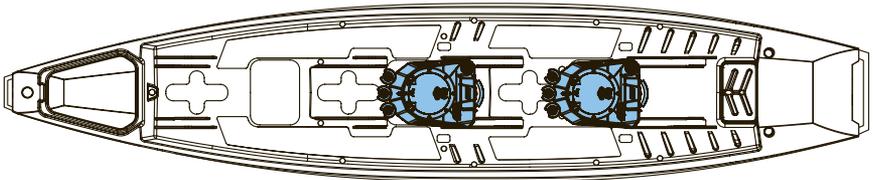


②

Attach the tie-down straps to a nearby padeye and tighten the straps.

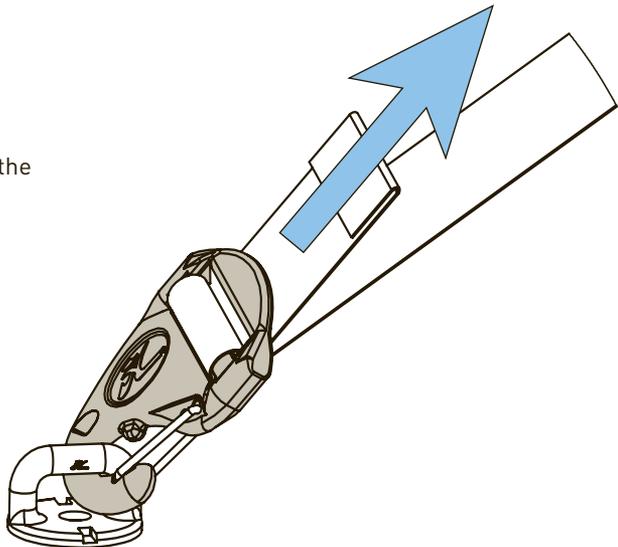


6 | Intake Tube Adjustment

Because every model is slightly different, you may have to modify the length of the intake tube.

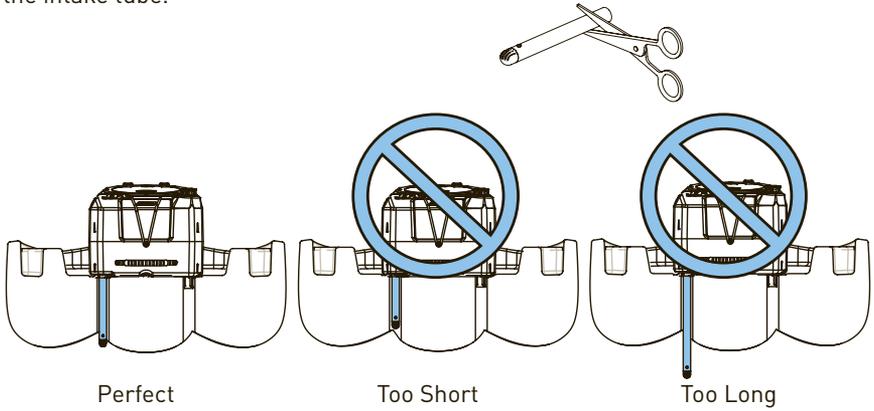


①

If needed, adjust the clear tube on the intake connector so the opening of the intake screen faces towards the bow of the kayak.

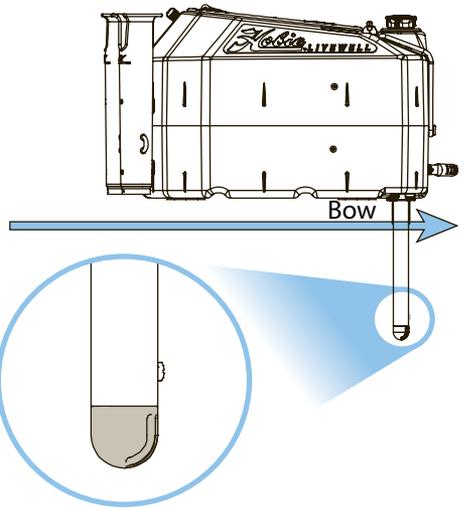



②

Once you have the tube oriented correctly, tighten and trim the zip tie around the connector and tube as shown.

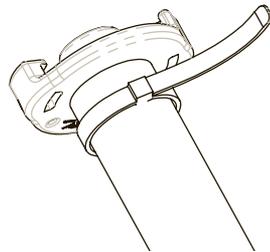




①

To adjust the water level, remove the internal tank partitions using the finger slot to help release the divider from the buttons.

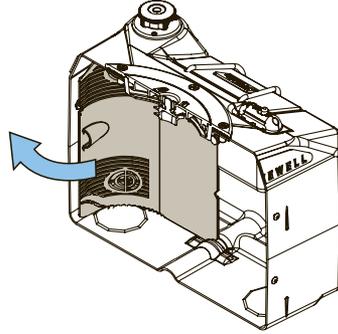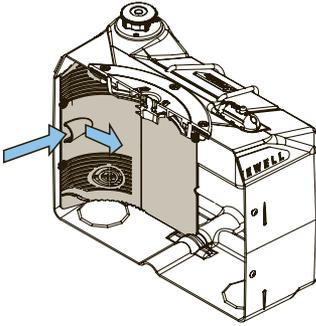


②

Attach the drain tube level clip over the middle hole if you want to fill the tank to the maximum capacity. To half the level, remove the clip completely.

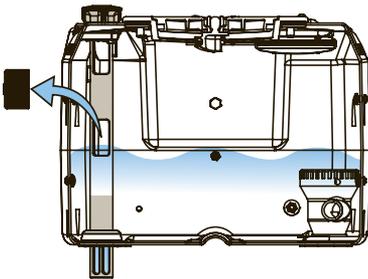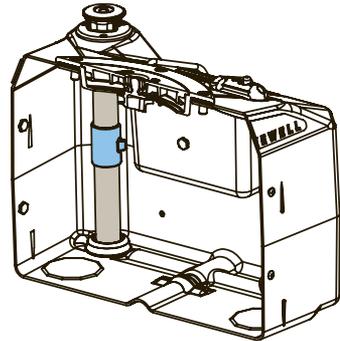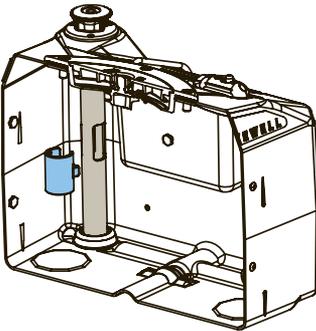

Clip Off:
Approx. 4 Gallons/ 16 L
35lbs/16 kg of water

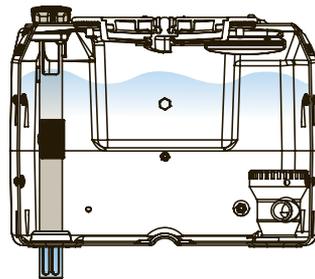


Clip On:
Approx. 8 Gallons/ 30 L
67 lbs/30kg of water

Filling the tank



①

Turn the red drain handle clockwise, and push down to engage the drain tube.

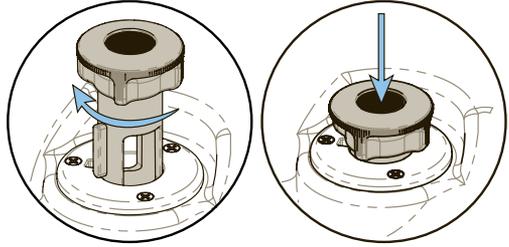


②

Turn on the pump. The pump needs to be primed for water to flow into the Livewell. Propel the kayak forward at a swift speed. This will force water into the intake tube, prime the pump, and start filling the tank.

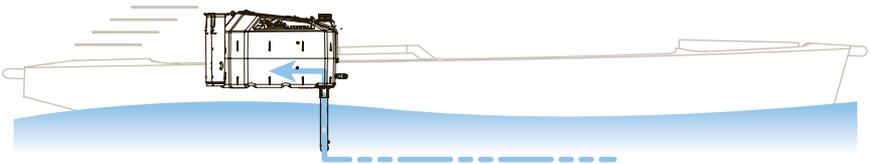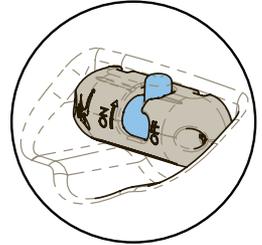

Holding Water


If you want to eliminate water flow, you can place the cap over the water inflow tube after it is full to prevent the water from draining when the switch is turned off.

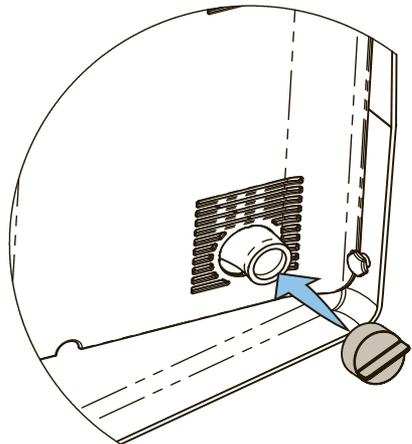

Draining the Tank



①

Turn the pump off

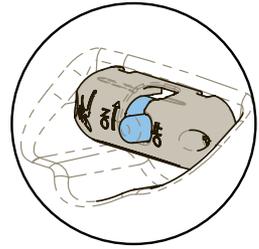

②

Turn the drain tube counter-clockwise and pull up to open the drain. Once the drain is all the way up, turn it slightly to the left or right to hold the tube in the up/open position.

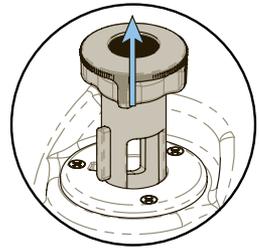

Tank Care

Because the Livewell assembly contains electric components, use care storing it. Proper maintenance is vital to keeping your Livewell working properly.

- **Washing**

Keeping your well and pump clean by washing it in fresh water and letting it dry. This will help to prevent salt and mineral corrosion.

- **Battery Care**

When not in use, unplug the battery from the Livewell and keep it stored in a dry place. If you are storing the battery for a long time, be sure to fully charge it before storing. Recharge the battery once a month during long term periods of storage.


- **Mildew and Odor Prevention**

When storing, you should allow the inside of the Livewell to dry and keep the hatch open to allow for airflow.


10 | Optional Rod Holder Installation

The Livewell comes with three pre-installed rod holders. More rod holders can be purchased and installed using the pre-marked drill locations as a template.


Standard: Sport, Oasis,
Tandem Island

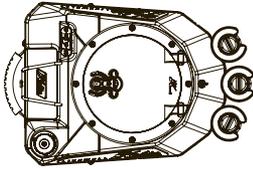


+2: Revolution 11,
Revolution 13, Quest
11, Quest 13, Adventure
Island

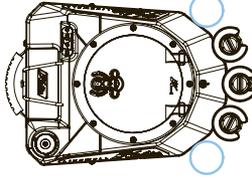


+4: Compass

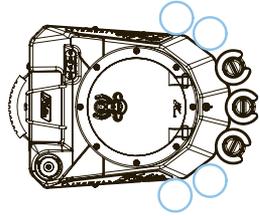

+4: Outback, Revolution 16

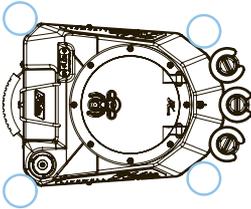


+8: Pro Angler 12, Pro
Angler 14, Pro Angler 17T

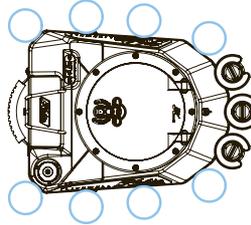



1

Drill a 3/16" hole in the
pre-located dimples on
the tank

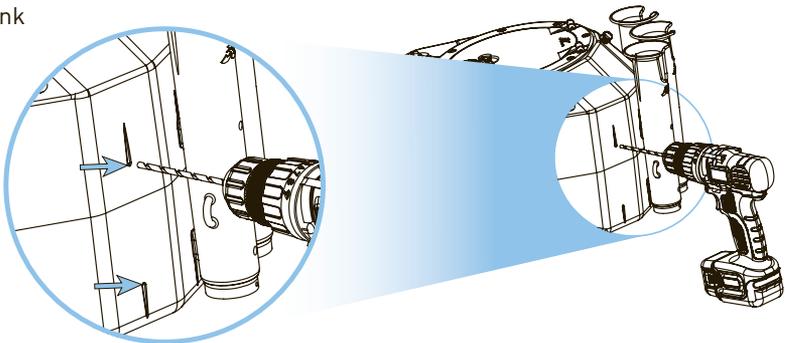



②

Install the mounting screw into the bottom slotted hole on the rod holder and push the rubber washer into place. This will help stabilize the screw in during installation.

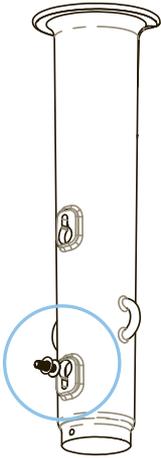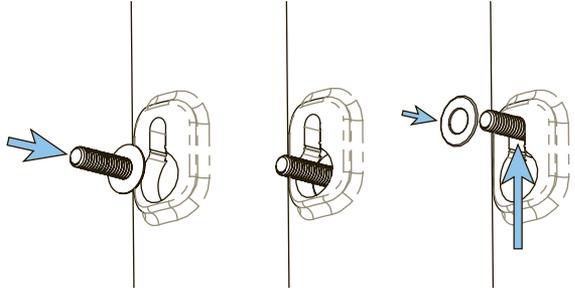

③

Thru-bolt the rod holder to the tank so that the nuts are tight. Do not overtighten as it can damage the rubber gasket.

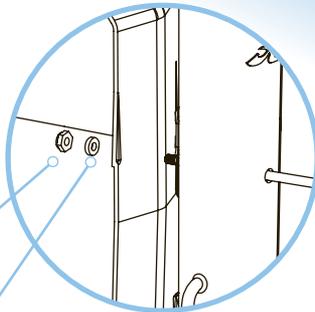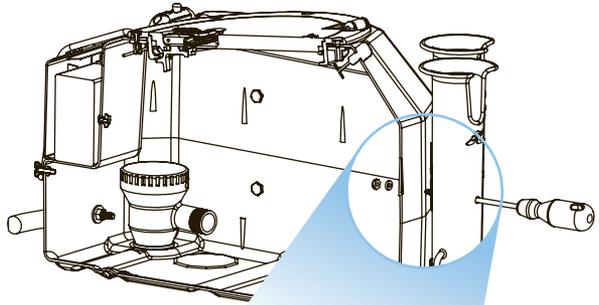

Nut
Rubber Washer



Hobie Cat Company

Holding Company
Oceanside, California, USA
1-800-HOBIE-49

Hobie Cat Australasia

Subsidiary
Huskisson, New South Wales, Australia
1-800-4-HOBIE

Hobie Cat Europe

Subsidiary
Toulon, France
+33(0)494 08 78 78

Hobie Kayak Europe

Independent Distributor
Stellendam, The Netherlands
+31(0)187 499 440

Hobie Cat Brasil

Independent Distributor
Porto Belo, Santa Catarina, Brazil
+55 (21) 3942 6815

Hobie.com